

## SC650 (U) GNSS Receiver

CORS and Monitoring



# SC650 (U) TECHNICAL FEATURES

## RECEIVER

	GPS: L1C/A, L1C, L1P, L2C, L2P, L5
	GLONASS: L1, L2, L3
	BEIDOU: B1I, B2I, B3I, B1C, B2a, B2b, ACEBOC
Satellite signals tracked	GALILEO: E1, E5a, E5b, E6, ALTBOC
	QZSS: L1C/A, L2C, L5
	IRNSS: L5
	SBAS
PPP	B2b-PPP
Channels	1100+
Position Rate	20 Hz
Signal Reacquisition	< 1 s
Cold Start	< 60 s
Hot Start	< 10 s
Internal Memory	32 GB storage
External Memory	TF card supported
Multipath and interference mitigation technology	Yes

## POSITIONING<sup>1</sup>

HIGH PRECISION STATIC SURVEYING	
Horizontal	2.5 mm + 1 ppm RMS
Vertical	5 mm + 1 ppm RMS
RTK (< 30 Km) <sup>2</sup>	
Fixed RTK Horizontal	8 mm + 1 ppm RMS
Fixed RTK Vertical	15 mm + 1 ppm RMS
PPP Accuracy	< 20 cm RMS
SBAS Accuracy <sup>3</sup>	< 60 cm RMS

## INTERNAL MODEM

Band	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28 LTE TDD: B38/B39/B40/B41 UMTS: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8 Nano SIM card
------	---

## INTERNAL RADIO

Type	Tx - Rx 1 W
Frequency Range	410 - 470 MHz 902.4 - 928 MHz
Channel Spacing	12.5 KHz / 25 KHz
Maximum Range <sup>4</sup>	3-4 Km in urban environment Up to 10 Km with optimal conditions

## USER INTERFACE

LEDs	GSM, Differential data, Satellites
------	------------------------------------

## SYSTEM CONFIGURATION

Operating System	Linux
Processor	A7 platform

## COMMUNICATION

	Power input: Lemo-0 female, 2 pin DB9 9pin: ➢ RS232_RXD (Port receives the data) ➢ RS232_TXD (Port sends the data) ➢ RS232_RTS (Request send data) ➢ RS232_CTS (Allow send data)
I/O Connectors	RJ45 M12 (RS232, RS485, CAN, EVENT, 1pps) LTE TNC UHF/LoRa (Optional) <sup>5</sup> TNC GNSS external antenna TNC
Bluetooth	BT 5.0 EDR, LE
Wi-Fi	802.11b/g To upgrade the software, manage the status and settings, and download data, use a smartphone, tablet, or other internet-enabled electronic device
Web UI	
Reference outputs	Raw data, RTCMV2.x/V3.2/V3.3, Rinex v3.04/v2.11/etc.
Navigation outputs	NMEA 0183

## NETWORKING SERVICES

NTRIP	Caster/Server/Client
Remote Management	By Stonex Software
FTP server	For data download
Email alerts	For low storage and other warning messages
NTP server	Support
Others	DDNS, VPN, SNMPD, Firewall

## POWER SUPPLY


Voltage	10-28V DC wide voltage
Power consumption	3.7-4.8W

## PHYSICAL SPECIFICATION

Dimensions	158 mm x 142 mm x 43 mm
Weight	570 g
Operating Temperature	-40°C to 80°C (-40°F to 176°F)
Storage Temperature	-45°C to 85°C (-49°F to 185°F)
Waterproof/Dustproof	IP68
Shock Resistance	Designed to endure to a 1.5 m drop on concrete floor with no damage
Humidity	100% non-condensing

1. Accuracy and reliability are generally subject to satellite geometry (DOPs), multipath, atmospheric conditions and obstructions. In static mode they are subject even to occupation times: the longer is the Baseline, the longer must be the occupation time.
2. Network RTK precision depends on the network's performance and is referenced to the closest physical base station.
3. It depends on the SBAS system's performance.
4. Varies with the operating environment and with electromagnetic pollution.
5. Optional, on request when ordering.

Illustrations, descriptions and technical specifications are not binding and may change

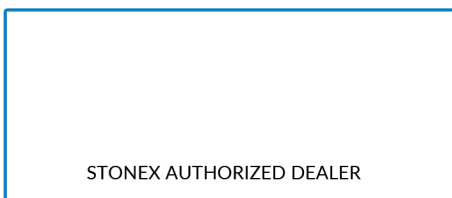

**STONEX®**  
Viale dell'Industria 53 - 20037 Paderno Dugnano (MI) - Italy  
Phone +39 02 78619201  
www.stonex.it | info@stonex.it